


# Serenade

<b>Seating Capacity</b> .....	3 Adults	
<b>Dimensions</b> .....	83" x 66" x 30", (211 cm x 168 cm x 76 cm)	
<b>Corner Radius</b> .....	9" (23 cm)	
<b>Dry Weight</b> .....	460 lbs (209 kg)	
<b>Filled Weight (Average Fill)</b> .....	2,042 lbs (926 kg)	
<b>Water Capacity (Average Fill)</b> .....	240 US gallons (910 Liters)	
<b>Shipping Weight</b> .....	460 lbs (209 kg)	
<b>Export Shipping Weight:</b> .....	<b>510 lbs (231 kg)</b>	
<b>Electronic Controls</b> .....	Programmable digital panel with LED readout	
<b>Pump 1</b> .....	North America (60 Hz): 2-Speed, 2.5 HP break, 1.5 HP continuous, 48 Frame	
<b>Export (50 Hz):</b> .....	<b>2-Speed, 2.0 HP continuous</b>	
<b>Circulation Pump</b> .....	Optional with ClearZone Pro package	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>Optional escutcheon jets</b> </div>
<b>Filtration (factory default)</b> .....	2 Cycles for a total of 2 hours	
<b>Heater</b> .....	1.0kW/4.0 kW	
<b>Export (50Hz)</b> .....	<b>2.0 kW</b>	
<b>Total @Home Jets</b> .....	18	
<b>Seat 1 UltraLounge Jets</b> .....	2 Cluster Storm Rifled, 3 Power Storm Twirl, 2 Power Storm Twister, 2 Pillow Mini Directional	
<b>Seat 2 Jets</b> .....	6 Cluster Storm Directional	
<b>Seat 3 Jets</b> .....	2 Mini Storm Rifled, 1 Poly Storm Rifled	
<b>Massage Selectors</b> .....	None	
<b>Special Features</b> .....	Tactile Therapy	
<b>Water Management System</b> .....	One 75 ft <sup>2</sup> filter cartridge; 8" Weir	
<b>Optional</b> .....	ClearZone® Pro Water Purification System	
<b>LED Lighting</b> .....	One multi Color LED footwell light	
<b>Optional</b> .....	Crystal FX	
<b>Synthetic Cabinet Colors</b> .....	Adobe Tan, Stoneridge Grey, Mayan Brown	
<b>Terracina Cabinet (Optional)</b> .....	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midnight Maple	
<b>Acrylic Colors</b> .....	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone	
<b>Headrests</b> .....	1 Jet Therapy Pillow	
<b>Water Feature</b> .....	None	
<b>Electrical Requirements:</b> .....	North America (60 Hz): 120V@15A or 240 VAC@30A or 40A <b>Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs</b>	
<b>Warranty*</b> .....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 5 Years Acrylic Shell Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 1 Year Lights, 6 Months for Stereo; <b>Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic Shell Surface, 2 Years Plumbing, 2 Years Equipment and Controls, 2 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 1 Year Lights, 6 Months for Stereo</b>	
<b>Audio System (Optional)</b> .....	Stereo system with Bluetooth capability; 2 premium speakers and a subwoofer	

\*(See Warranty Document for Specific Details)

# Serenade

## Massage Selector Diagram

Pump 1 - Drain & Skimmer




1. Pump 1 all jets

Spa Operation Subject to Change without Notice

## Seat Depths


- 1 = 25.00" (63.50 cm)
- 2 = 26.00" (66.04 cm)
- 3 = 26.00" (66.04 cm)
- 4 = 27.00" (68.58 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance  $\pm 0.5"$  (1.27 cm).**

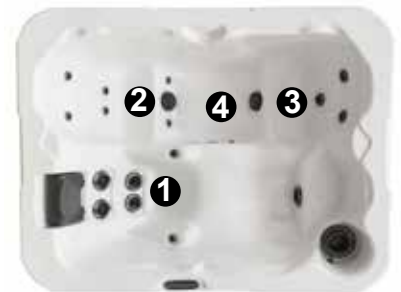

# Serenade

## Jet Designation

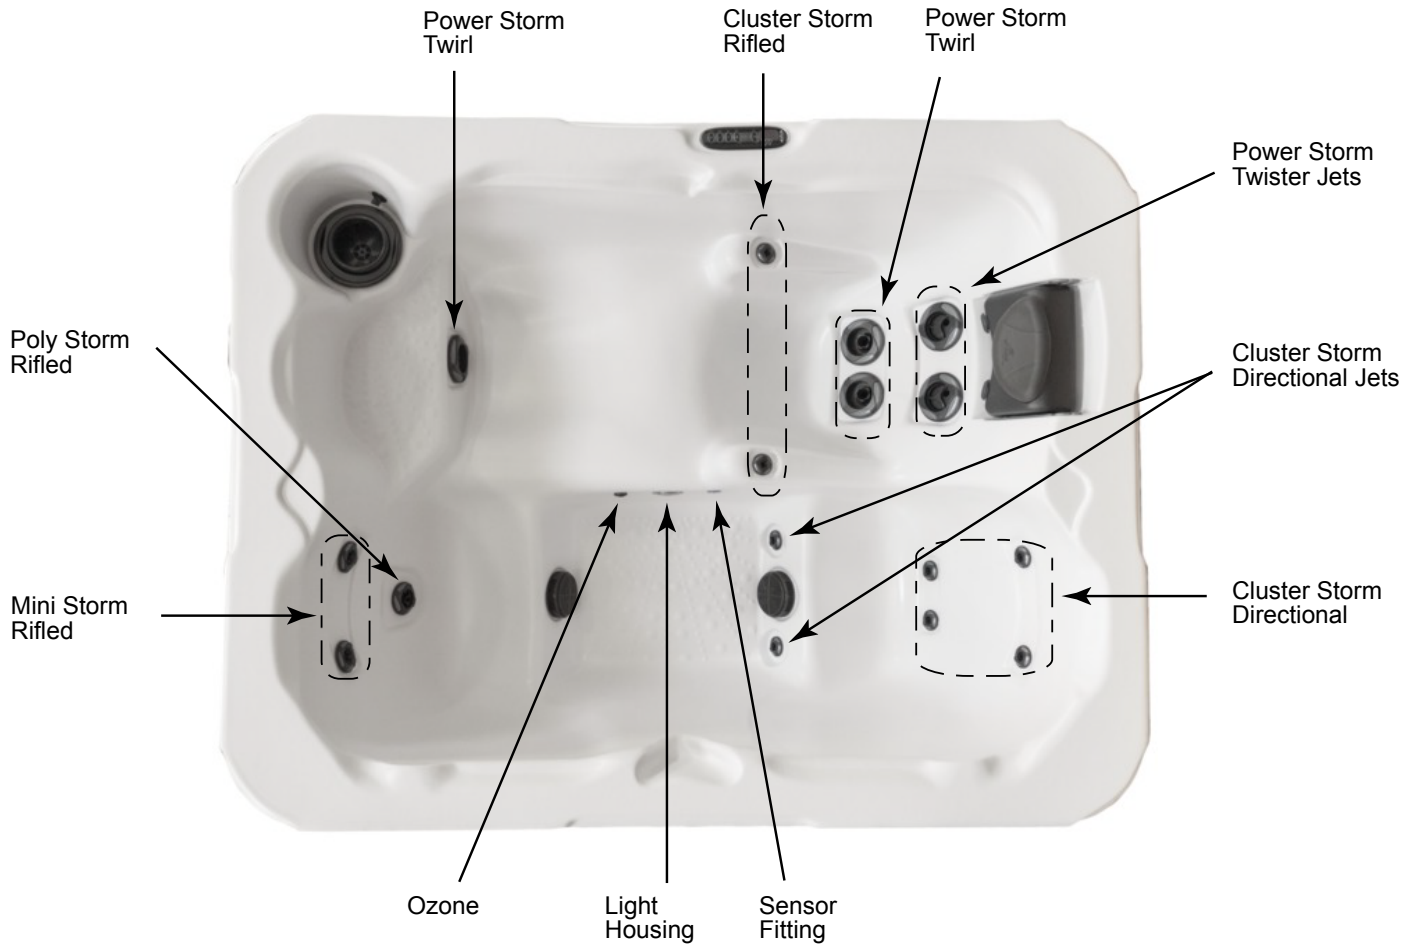


Dimensions/Operation/Specifications are Subject to Change Without Notice

### 18 Total Jets (textured)





### Total Jets

# Serenade

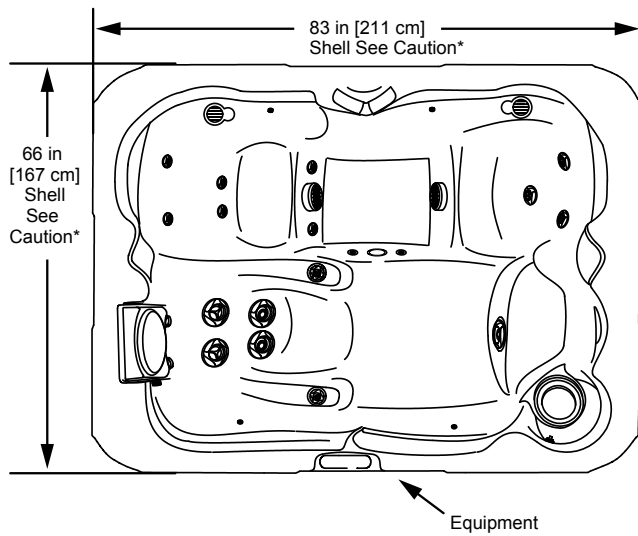

Front View of Spa

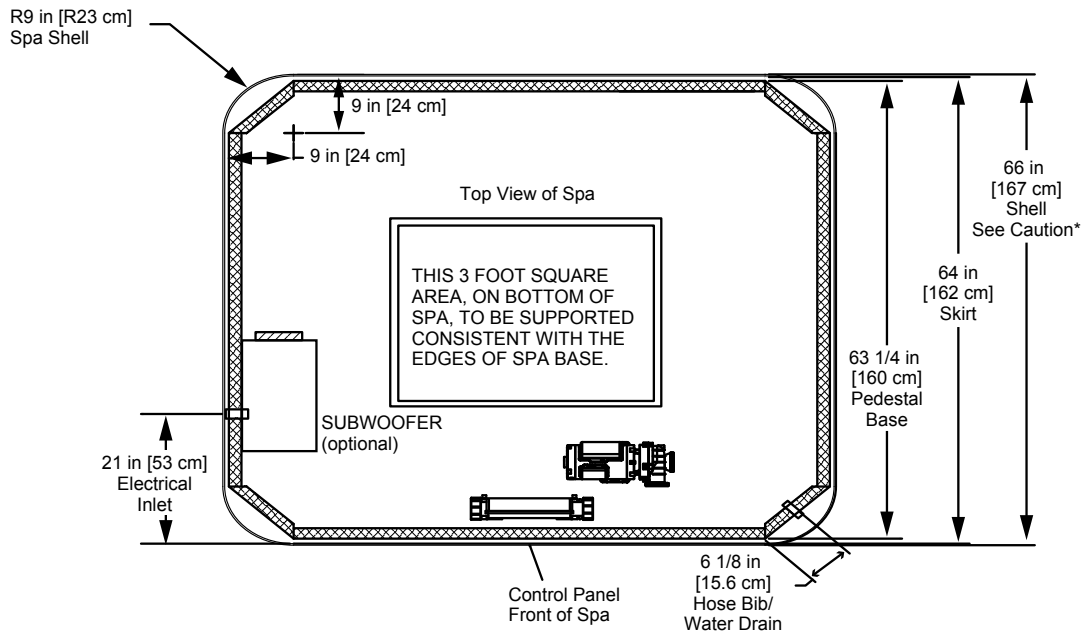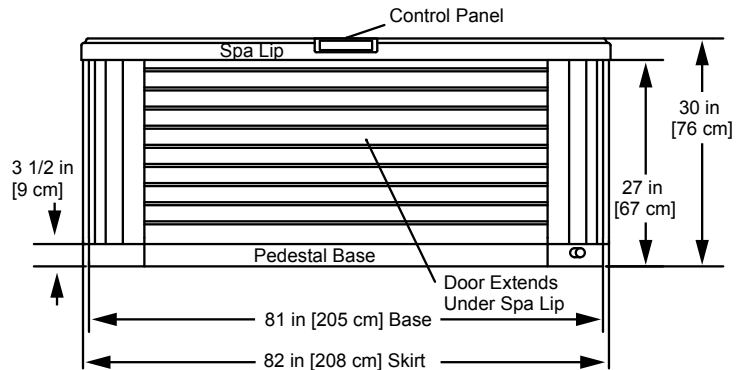

**Note:**

1. Subject to change without notice.
2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
5. Stereo Optional.



**\*Caution:**

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**